


QuikTrak LIVE



The Quiktrak LIVE solution has been developed to provide a robust, reliable, and flexible product to provide tracking and security on personal, business or fleet assets.

Quiktrak LIVE is perfect for

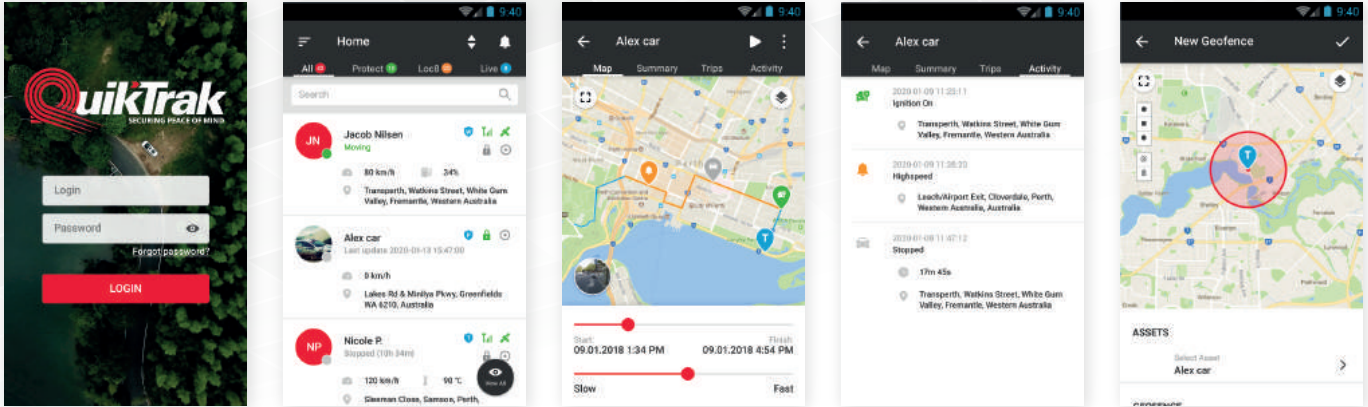

trucks



cars



motorbikes



machinery



trailers



boats

Features

- **24/7 Live analytics and tracking**
 - Optimized updating between 2 – 60 seconds
 - Location, status, speed and input states instantly updated
 - Instant alarms and alerts direct to your mobile and/or email
- **Compliance reporting**
 - Fringe Benefit Tax compliant log booking
 - Trip logs and off-road usage reporting
- **Intuitive smart phone and web access**
 - IOS and ANDROID compatible – See app stores
 - Cloud based web interface
 - Multi mapping interface – Google, Open source, Bing and street view mapping available
- **Historical analytics and reporting**
 - Route playback
 - Activity – Movement and stationery/stop logs
 - Mileage and engine hours
 - Average fuel consumption
 - Trip and log reports
 - Alarms, geofencing and POI reporting
- **Australian designed and supported**
 - Online and in-app support
 - 24-month hardware warranty
 - Theft recovery assistance
- **Alarms and input options – Real time notifications via in-app notice, emails and/or phone**
 - Ignition state
 - Battery level and connectivity
 - Geofence locations
 - Movement
 - Speeding – Street speed and preset
 - Excessive idling
 - Impact/Crash indication
 - Negative alarm input
 - Positive PTO/Switch input
 - Extended battery OR I-button/Driver tag OR additional input
- **Geofencing and Point of interest**
 - Route
 - Location/site
- **Interval reminders – based on engine hours, mileage, date, or duration.**
 - Service intervals
 - Tire replacement/rotation
 - Registration reminders
 - Insurance renewal
 - Driver's license reminders
 - Custom reminders

Device Specification

- 3G WCDMA Band
 - B1
 - B2
 - B5
 - B8
- 4G LTE BAND
 - FDD (B1,B2,B3,B4,B5,B7,B8, B28)
 - TDD (B40)
- Voltage range
 - 9-72V
- GPS Band
 - L1-Band 1575MHz
- Working Temperature and Humidity
 - -20°C~75°C; 20%~90% RH
- Work Current
 - GPRS(500mA);
 - WCDMA(700mA);
 - LTE(800mA)
- Dimensions (mm)
 - 89(L) X 37(W) X 12(H)
- Net Weight
 - 46g
- Standby Current Power
 - Off (20uA)
 - Sleep (3mA)
 - Idle (22mA)

Wiring Diagram and Explanation

